

## Shuttle XPC nano PC system without operating system

The Shuttle XPC nano NC1010XA is a fully configured PC system in nano format, but without operating system and input devices. It is based on Shuttle's XPC nano Barebone NC1010XA with Intel's power-saving ULV (ultra-low-voltage) processors of the Whiskey-Lake-U generation. It supports two digital video outputs for UHD/4K displays with 60 Hz and has an empty bay for one 2.5" SATA drive that is up to 15 mm in height. Professional users will appreciate Intel Gigabit-LAN and one serial port which indicates what purposes this PC is mainly intended for: Digital Signage, POS, control, office or even multimedia.


### Feature Highlights

<b>Slim Design</b>	<ul style="list-style-type: none"> <li>• Slim plastic chassis, black</li> <li>• Dimensions: 142x142x42 mm (LWH), 847 ml</li> <li>• Incl. Stand &amp; VESA mount (75/100 mm)</li> <li>• Hole for Kensington Lock</li> <li>• Operating temperature: max. 40 °C</li> </ul>
<b>Operating System</b>	<ul style="list-style-type: none"> <li>• An operating system is not included</li> <li>• Supports Windows 10/11 &amp; Linux (64-bit only)</li> </ul>
<b>Processor</b>	<ul style="list-style-type: none"> <li>• Intel Celeron 4205U, Dual Core, 15 W TDP</li> <li>• Intel ULV "Whiskey-Lake-U" Generation</li> <li>• Integrated Intel UHD graphics 610, DX12</li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>• 4GB DDR4 SO-DIMM memory module</li> </ul>
<b>Drive Bay</b>	<ul style="list-style-type: none"> <li>• One 6.35 cm / 2.5" bay, 15 mm height supports one SATA hard disk or SSD</li> </ul>
<b>M.2 SSD</b>	<ul style="list-style-type: none"> <li>• 128 GB M.2-2280 SATA SSD card</li> </ul>
<b>Connectors</b>	<ul style="list-style-type: none"> <li>• HDMI 2.0a, DisplayPort 1.2</li> <li>• 2x USB 3.2 Gen 1 (Type A/C), 2x USB 2.0</li> <li>• Intel Gigabit LAN, RS232 COM port</li> <li>• SD card reader, Audio Combo</li> </ul>
<b>WLAN</b>	<ul style="list-style-type: none"> <li>• Wireless LAN 802.11n, internal antenna</li> <li>• Optional upgradeable with Shuttle WLN-M/M1</li> </ul>
<b>Power Supply</b>	<ul style="list-style-type: none"> <li>• External 65 W fanless power adapter</li> </ul>
<b>Applications</b>	<ul style="list-style-type: none"> <li>• Home Media, Office, Digital Signage, etc</li> </ul>

## XPC nano PC system NC1010XA (without OS)




Images for illustration purposes only.



### Products based on the Shuttle XPC nano Barebone NC1010XA

Product	Type	Operating System	Processor	Storage	RAM	Bar Code
NC10U	Barebone	—	Celeron 4205U	—	—	887993001975
NC1010XA	System without OS	—	Celeron 4205U	128 GB M.2 SSD	4 GB DDR4	4046047103522
NC1010BA	System with OS	Windows 10 Pro	Celeron 4205U	64 GB M.2 SSD	4 GB DDR4	4046047103515

## Shuttle XPC nano System NC1010XA – Product Views

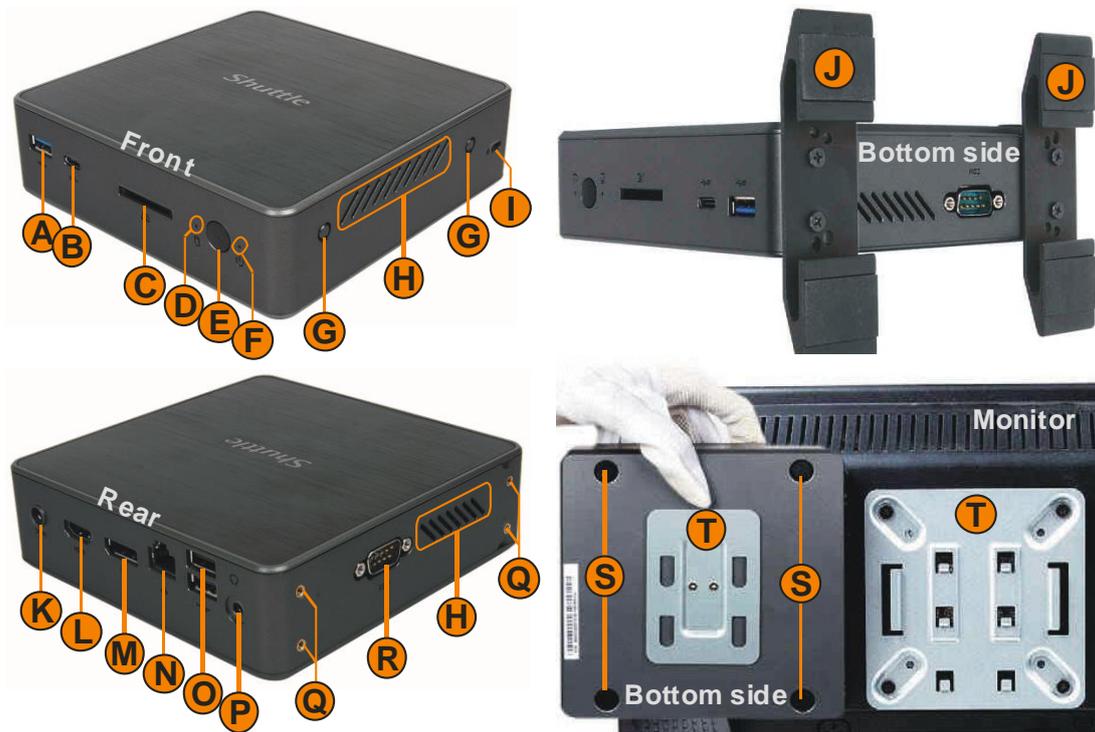

- |   |  |
|---|--|
| <b>A</b> USB 3.2 Gen 1 Type A (Blue)              | <b>K</b> DC input for power adapter          |
| <b>B</b> USB 3.2 Gen 1 Type C                     | <b>L</b> HDMI                                |
| <b>C</b> SD Card reader                           | <b>M</b> DisplayPort                         |
| <b>D</b> Hard disk LED indicator                  | <b>N</b> Gigabit LAN (RJ45)                  |
| <b>E</b> On/Off Button                            | <b>O</b> 2x USB 2.0                          |
| <b>F</b> Power-on LED indicator                   | <b>P</b> Audio Combo (Headphones & Mic)      |
| <b>G</b> 2x perforation for optional WLAN antenna | <b>Q</b> 4x Mounting hole for vertical stand |
| <b>H</b> Vents                                    | <b>R</b> RS232 COM port *)                   |
| <b>I</b> Hole for Kensington Lock                 | <b>S</b> 4x Rubber foot                      |
| <b>J</b> 2x Vertical stand                        | <b>T</b> VESA mounting kit (2 pieces)        |

\*) Note: The serial connector (COM port) cannot be used, if NC1010XA is operated in vertical position.

## Operating Positions

1. Horizontal
2. Vertical with Stand
3. VESA-mounted behind a monitor

Stand and VESA mount with screws are included.



## Product Features



### Stylish and absolutely small

The black plastic case with its curves is certain to be the eyecatcher on your desk. At a volume of barely 850 ml, it may also be elegantly hidden behind monitors thanks to the supplied VESA mount. Despite its dinky dimensions, it provides generous connectivity options and even room for one additional 2.5 inch drive which can be an SSD or HDD.



### SD Card Reader

The built-in SD card reader at the front side makes file transfer from and to a digital camera easy. It takes SD, SDHC and SDXC memory flash cards in standard size format and also supports booting from bootable SD cards.




### Serial Port

Many PCs do not have these legacy ports any longer, since they have been superseded and replaced by USB for most consumer applications, but they are still commonly used in industrial automation systems, scientific analysis, POS systems and others. The Shuttle XPC nano System NC1010XA features one serial RS-232 interface with the traditional 9-pin D-Sub connector for easy connection to appropriate components. Note: The serial connector (COM port) cannot be used, if the NC1010XA is operated in vertical position.



### Dual Monitoring via HDMI and DisplayPort

The NC1010XA can connect two digital displays through its HDMI and DisplayPort. Dual monitoring helps improve on productivity by allowing for spreading multiple windows across two monitors while working with them simultaneously.

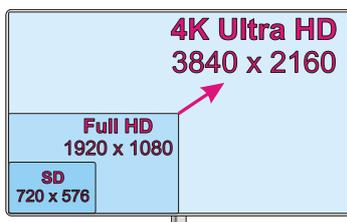

### Supports 4K Ultra HD at 60 Hz

The NC1010XA supports two displays running at 4K (3840 x 2160 / 2160p) high resolution at 60Hz frames per second. Being the successor to the Full HD standard, Ultra HD delivers a four times higher resolution with a wider colour space and colour depth.

Note: Dual channel memory (two identical modules) is required to support 4K Ultra-HD resolution (2160p).




### USB 3.2 type A and type C

The Shuttle XPC nano System NC1010XA has four USB ports, two of which are USB 3.2 Gen 1 with up to 5 Gb/s full duplex which means an up to 10 times greater performance than USB 2.0. One of the USB 3.2 connectors is a "type-C" connector with reversible plug orientation. This type of connector is especially intended for use with next-gen mobile devices.



### Supports high-capacity drives

The NC1010XA supports one additional 2.5 inch drive up to a maximum height of 15 mm. This makes overall capacities of up to 5 TB possible, while many other PCs in a similar form factor are limited to drives with a maximum height of 7 to 9.5 mm.

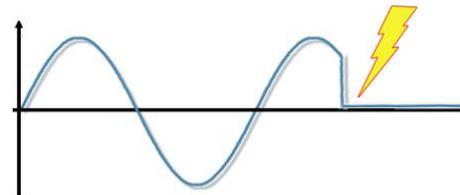

### Power-on after Power Fail

The BIOS setup provides a "Power-on after Power Fail" function that can be found under "Power Management Configuration". As the name indicates, this function determines the PC's behaviour after power failure. As a matter of the nature of this function, it may fail after short power failures. This is why the NC1010XA also comes with a hardware-based solution. By removing Jumper JP1 (see Quick Installation Guide), the system will start unconditionally once power is applied.



### Kensington Lock

This is a small, metal-reinforced hole as part of an anti-theft system. The Shuttle XPC nano System NC1010XA provides an appropriate hole on both sides of its chassis. The lock-and-cable is not included.

## Shuttle XPC nano System NC1010XA - Specifications

<b>Chassis</b>	<p>Barebone PC with a black plastic chassis                  Dimensions: 142 x 142 x 42 mm (LWH) = 847 ml                  Weight: 0.4 kg net, 1.2 kg gross                  Hole for Kensington Lock                  Includes vertical stand and 75 / 100 mm VESA mount</p>
<b>Low Power Consumption</b>	<p>Power consumption in idle mode with 2.5" SSD under Windows 10: ca. 6 W only</p>
<b>Operation Position</b>	<p>1) Horizontal                  2) Vertical with stand                  3) VESA-mounted behind an appropriate monitor</p>
<b>Operation System</b>	<p>This barebone system comes without operating system.                  It is compatible with:                  - Windows 10/11, 64-bit                  - Linux 64-bit</p>
<b>Processor</b>	<p>Model: Intel Celeron 4205U (ULV)                  System-on-a-chip architecture (SoC) with integrated memory and graphics controller:                  no chipset required                  FCBGA1528 package - directly soldered onto the mainboard                  Code name: Whiskey Lake-U (8<sup>th</sup> Generation Intel Core)                  Cores / Threads: 2 / 2                  Clock rate: 1.8 GHz                  L1/L2/L3 Cache: 128 kB / 512 kB / 2048 kB                  TDP wattage: 15 W maximum                  Manufacturing process: 3<sup>rd</sup>-generation enhanced 14nm+ +                  Maximum Tjunction Temperature: 100 °C                  Supports 64-bit, VT-x (EPT), VT-d, Enhanced SpeedStep, NX bit, AES-NI, SSE 4.1/4.2</p>
<b>Cooling fan</b>	<p>Built-in CPU cooling fan with 4-pin connector                  Supports temperature-controlled RPM fan speed</p>
<b>Integrated Graphics</b>	<p>Intel UHD Graphics 610                  GPU clock frequency: 300~900 MHz                  Execution Units (EUs): 12                  Supports DirectX 12                  Supports full H264, H265 8/10 bit, VP8/9, VC-1, AVC hardware decoding                  Supports Quick Sync Video and Clear Video HD technology                  Supports up to two independent screens:                  1) DisplayPort 1.2 supports Ultra HD @ 60 Hz                  2) HDMI 2.0a supports Ultra HD @ 60 Hz</p>

© 2022 by Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purposes only.

<p><i>Mainboard &amp; BIOS</i></p>	<p>AMI BIOS in 8 MByte EEPROM with SPI interface          Supports resume after power failure          Supports Wake on LAN (WOL) and Power on by RTC Alarm          Supports booting from USB devices and SD card reader          Supports hardware monitoring and watch dog function          Supports Unified Extensible Firmware Interface (UEFI)          Supports Firmware TPM v2.0 (fTPM)</p>
<p><i>Power Adapter</i></p>	<p>External 65 W power adapter (fanless)          Input: 100~240 V AC, 50/60 Hz, max. 1.6 A          Output: 19 V DC, max. 3.42 A, max. 65 W          DC cable ca. 175 cm with coaxial connector: 5.5 / 2.5 mm (outer/inner diameter)          The DC-input of the computer supports 19V±5%.          AC cable, ca. 170 cm, with flat, two-pole Europlug</p>
<p><i>Memory</i></p>	<p>4 GB DDR4 SO-DIMM memory module          Two SO-DIMM slots with 260 pins available          Supports DDR4-2133 (PC4-17000) SDRAM at 1.2 V          Supports a maximum of 32 GB per DIMM,          maximum total size: 64 GB          Supports two unbuffered DIMM modules (no ECC or registered)</p>
<p><i>2.5" Drive Bay</i></p>	<p>Supports one additional Serial ATA hard disk          or one SATA SSD drive in 6.35 cm / 2.5" format          Device height: 15 mm (max.)          Supports Serial-ATA III, 6 Gb/s (600 MB/s) bandwidth</p>
<p><i>Card Reader</i></p>	<p>Integrated SD card reader supports SD, SDHC and SDXC memory flash cards          Supports booting from SD card</p>
<p><i>M.2 SSD</i></p>	<p>128 GB SSD card in M.2-2280 format with SATA interface</p>
<p><i>Audio</i></p>	<p>Audio Realtek® ALC 662 High-Definition Audio Codec          3.5 mm / 4-pole combo audio connector for headphones and microphone [2]          Digital multi-channel audio output: via HDMI and DisplayPort</p>
<p><i>Gigabit LAN</i></p>	<p>Ethernet Controller Intel i211          Supports 10 / 100 / 1.000 MBit/s operation (Gigabit)          Supports WAKE ON LAN (WOL)          Supports network boot by Preboot eXecution Environment (PXE)          IEEE 802.3az Energy Efficient Ethernet (EEE), Interface: PCIe v2.1</p>
<p><i>Wireless Network (WLAN)</i></p>	<p>Built-in M.2-2230-A/E WLAN card and internal antenna          Single-Chip 1T1R WLAN Controller Realtek RTL8188EE          Supports IEEE 802.11b/g/n, max. 150Mbps up-/downstream          Security: WPA/WPA2(-PSK), WEP 64/128-bit, IEEE 802.11x/i</p>

© 2022 by Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purposes only.

<i>Front Panel connectors</i>	<p>USB 3.2 Gen 1 Type A (max. 5 Gbps)                  USB 3.2 Gen 1 Type C (max. 5 Gbps)                  SD card reader (supports SD, SDHC, SDXC)                  Power button                  Power LED (blue, flashing when in suspend mode)                  HDD LED (orange)</p>
<i>Back Panel connectors</i>	<p>DisplayPort 1.2 [1]                  HDMI 2.0a                  2x USB 2.0 Type A                  Gigabit LAN (RJ45)                  Audio Combo Port for headphones and microphone (3.5 mm jack, 4-pole) [2]                  DC-input connector for external power adapter                  2x perforation for optional external WLAN antennas</p>
<i>Left Side connectors</i>	<p>Serial RS232 COM port (D-Sub, 9-pin)                  Note: The serial connector (COM port) cannot be used, if the NC1010XA is operated in vertical position.</p>
<i>Always-On Jumper</i>	<p>By removing Jumper JP1 (please refer to the Quick Installation Guide), the system will start unconditionally once power is applied. [4]</p>
<i>Clear CMOS Jumper</i>	<p>Short Jumper JP2 for about 10 seconds to restore factory settings of BIOS.</p>
<i>Supplied Accessories</i>	<p>Multi-language Quick Installation Guide                  Driver DVD for Windows                  VESA mount set (two parts), made of steel,                  Six screws (4x M4x10, 2x M2.5x3)                  Bracket for a 2.5" drive with eight screws (M3x5)                  Two aluminium stands (110 mm width) with four screws M3x7 for vertical operation                  Four black, rounded rubber feet, ca. 10 mm diameter x 2.5 mm                  Two screws for mounting of M.2 cards                  Power adapter 65 W with AC power cord</p>
<i>Optional Accessories</i>	<p><b>WLN-M / WLN-M1:</b> Wireless LAN module with two external antennas, supports WiFi IEEE 802.11n/ac (2.4 / 5 GHz) and Bluetooth 4.0</p>
<i>Environmental Spec</i>	<p>Operating temperature range: 0~40 °C [3]                  Relative humidity range: 10~90% (non-condensing)</p>

© 2022 by Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purposes only.

**Conformity &  
Certifications**

EMI: CE, FCC, BSMI, RCM, RED, VCCI

Safety: CB, BSMI, ETL

Other: RoHS, Energy Star, ErP

This device is classed as a technical information equipment (ITE) in class B and is intended for use in living room and office. The CE-mark approves the conformity by the EU directives:

(1) 2014/30/EU relating to electromagnetic compatibility (EMC),

(2) 2014/35/EU relating to Electrical Equipment designed for use within certain voltage limits (LVD),

(3) 2009/125/EC relating to ecodesign requirements for energy-related products (ErP),

(4) 2014/53/EU Radio Equipment Directive (RED)

**[1] How to convert DisplayPort into HDMI/DVI**

The DisplayPort outputs can be converted to HDMI or DVI by an additional, passive adapter cable. For example:

DELOCK 82590: 1 m, DisplayPort (male, 20p) to HDMI-A (male, 19p)

DELOCK 82435: 5 m, DisplayPort (male, 20p) to DVI-D (male, 24p)

The integrated graphics automatically detects the connected display and puts out the appropriate electric signal - either DisplayPort (without an adapter) or HDMI/DVI (with an adapter).

However, a monitor with a DisplayPort connector cannot be connected to the HDMI port with a simple, passive adapter. In this case an active adapter like Delock 62496 is required.

**[2] Audio connector**

The 3.5 mm audio jack at the back panel of this device supports both a 4-pole connector for headphones and microphone and headphones with only a 3-pole connector. Headsets with separate connectors for headphones and microphone, though, require an appropriate adapter, if also the microphone should be used.

**[3] Caution: For high ambient temperatures** over 35 °C we strongly recommend to use SSDs (supporting at least 70 °C) instead of hard disks.

**[4] Power-on after Power Fail:**

The BIOS setup provides a "Power-on after Power Fail" function that can be found under "Power Management Configuration". This function determines the PC's behaviour after power failure. As a matter of the nature of this function, it may fail after short power failures. This is why this PC also comes with a hardware-based solution. By removing Jumper JP1 (please refer to the Quick Installation Guide), the system will start unconditionally once power is applied.